

■ **LEP Progressive Lubrication Pump Unit**



✧ **Product Description**

LUBELite™ progressive pump unit is a kind of low-cost but high-quality pump unit which is being used in construction machinery, on-road machine, machine tool and general machinery widely.

This pump unit has a max. operating pressure of 350 bar. Hence, the applicable lubricant viscosity can be as high as NLGI 2 grease.

Each lubrication pump can have up to 6 pump elements installed simultaneously, forming 6 separate progressive lubrication systems.

✧ **Product Features**

1. Strong and stable power: BLDC motor or AC motor.
2. Suitable for harsh working conditions: maximum working pressure up to 350 bar.
3. Higher protection class: IP 66.
4. High-performance plastics plus die-cast aluminum alloy pump body: reduces overall weight but increases the pump strength.
5. The wider temperature tolerance range improves the pump's operating capability.

✧ **Technical Data**

<i>Power Supply</i>	DC 24 V	AC 230V/50 Hz	AC 380V/50 Hz
<i>Rated Power</i>	< 100 W		0.37 kW
<i>Power Socket</i>	DIN 43650 A		Wiring connection
<i>IP Class</i>	IP 66		IP 55
<i>Pump Element Mounting Port</i>	6 outlets, M20x1.5		
<i>Working Pressure</i>	Max. 350 bar		
<i>Tank Capacity</i>	2, 4, 6, 8, 10 L		
<i>Refilling Port</i>	DIN 71412 A and/or top lid		
<i>Lubricant</i>	NLGI 0, 1, 2		
<i>Working Temperature</i>	-41 °C ~ +70 °C		
<i>Mounting</i>	Vertical		

■ LEP Progressive Lubrication Pump Part Number

LEP21 2 T GL CH A0 D24 - 000020 / 000010 R

LUBelite 21 series pump station _____

Tank capacity _____

1: 2L 2: 4L 2P: 6L 3: 8L 10: 10L

Top lid _____

Blank: No T: Yes

Low level alarm _____

GL: DC 24V, PNP NC GN: No

Controller type ¹⁾ _____

C0: No controller integrated

CH: Controller integrated, unit of interval time is Hour

CM: Controller integrated, unit of interval time is Minute

Signal and cable code _____

Refer to below table

Power supply _____

D24: DC 24V, power socket (DIN 43650A)

D24V: DC 24V, power socket (DIN 43650A), with 5m cable

A23: AC 230V / 50Hz, power socket (DIN 43650A)

A23V: AC 230V / 50Hz, power socket (DIN 43650A), with 5m cable

A38: AC 380V / 50Hz, cable gland

A38V: AC 380V / 50Hz, cable gland, with 5m cable

Pump element ^{2) 3)} _____

0: No 1: 3.3 cm³/min 2: 6.0 cm³/min A: 1.3 ~ 6.2 cm³/min adjustable

Safety valve ²⁾ _____

0: No

1: Safety valve installed with ferrule connector of Ø6

2: Safety valve installed with ferrule connector of Ø8

3: Safety valve installed with ferrule connector of Ø10

Safety valve with grease return function ⁴⁾ _____

Blank: No R: Yes

1) When selecting "A38" power supply, only "C0" is valid.

2) The sequence is counterclockwise based on the pump top view.

3) When selecting "A" as pump element, then only "0" of safety valve is valid.

4) When selecting the grease return function, only 5 pump elements can be installed at most.


Signal and cable code explanation

The external signal cable kit has two options and they are mutually exclusive. All external signal cables are 5m length.

Controller		Low level sensor			External signal interaction				External signal cable kit	
Integrated	Signal Code	No	Yes		Remote alarm (NO)	Pulse	Remote startup	Modbus	No kit code	Kit code
			Signal to controller	Signal to customer						
No (C0)	0	X							0	
				X					1	
Yes (CH/CM)	A	X							0	
			X						0	
	B	X			X				0	B
	C	X				X			0	C
	D	X					X		0	D
	E	X						X	0	E
			X			X			0	F
	F	X				X			0	F
			X			X			0	F
	G	X					X		0	G
			X				X		0	G
	H	X						X	0	H
			X					X	0	H
	J	X						X	0	J
			X					X	0	J
	K	X				X	X		0	K
			X			X	X		0	K
	L	X				X		X	0	L
			X			X		X	0	L
	M	X				X		X	0	M
		X			X		X	0	M	
N	X					X	X	0	N	
		X				X	X	0	N	
P	X					X	X	0	P	
		X				X	X	0	P	
Q	X				X	X	X	0	Q	
		X			X	X	X	0	Q	
R	X				X	X	X	0	R	
		X			X	X	X	0	R	


■ **LEP Lubrication Pump Unit Dimension**

◇ **DC 24V or AC 230V/50 Hz, 2/4/6 L tank**

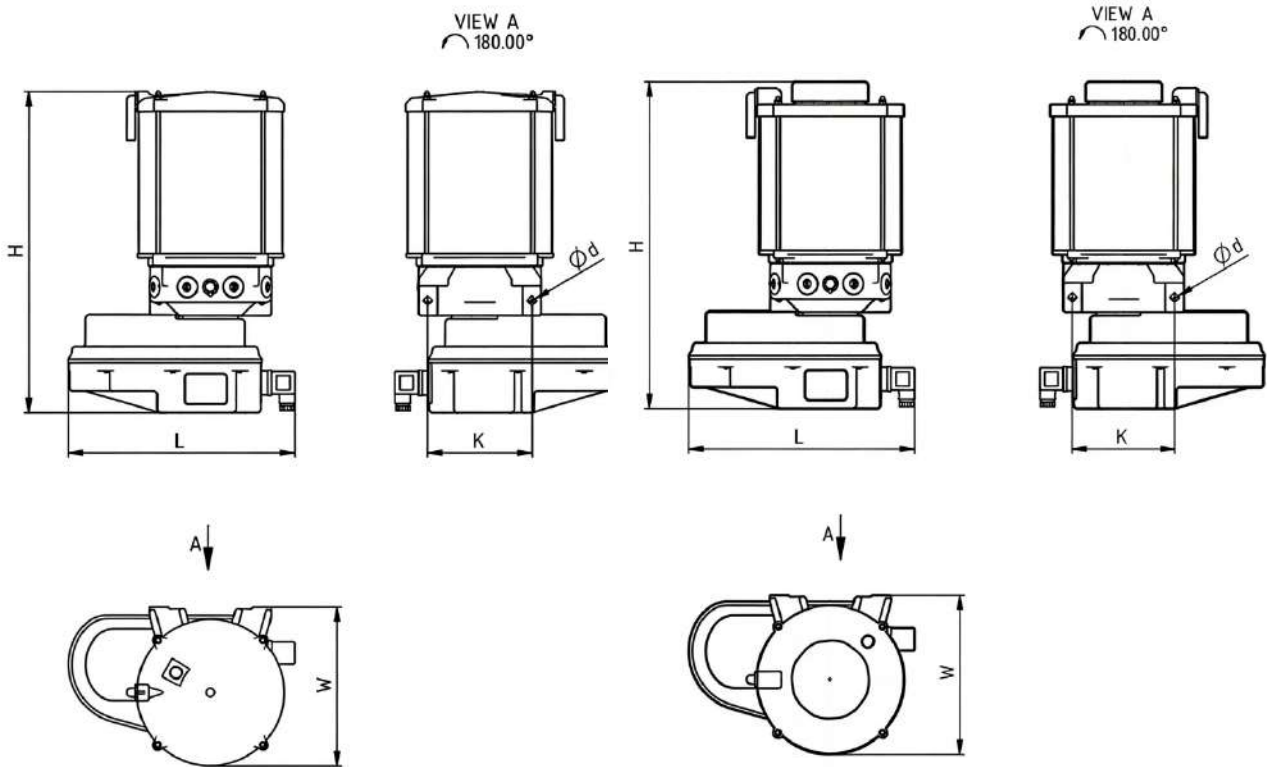


Model	Pump Element Mounting Port	Power Supply	Tank Capacity (L)	H (mm)	W (mm)	L (mm)	K (mm)	Ød (mm)
LEP211...	6 - M20x1.5	DC 24V or AC 230V/50Hz	2	353	197	283	130	9
LEP211T...				367				
LEP212...			4	393				
LEP212T...				406				
LEP212P...			6	485				
LEP212PT...				498				

✧ DC 24V or AC 230V/50 Hz, 8/10 L tank

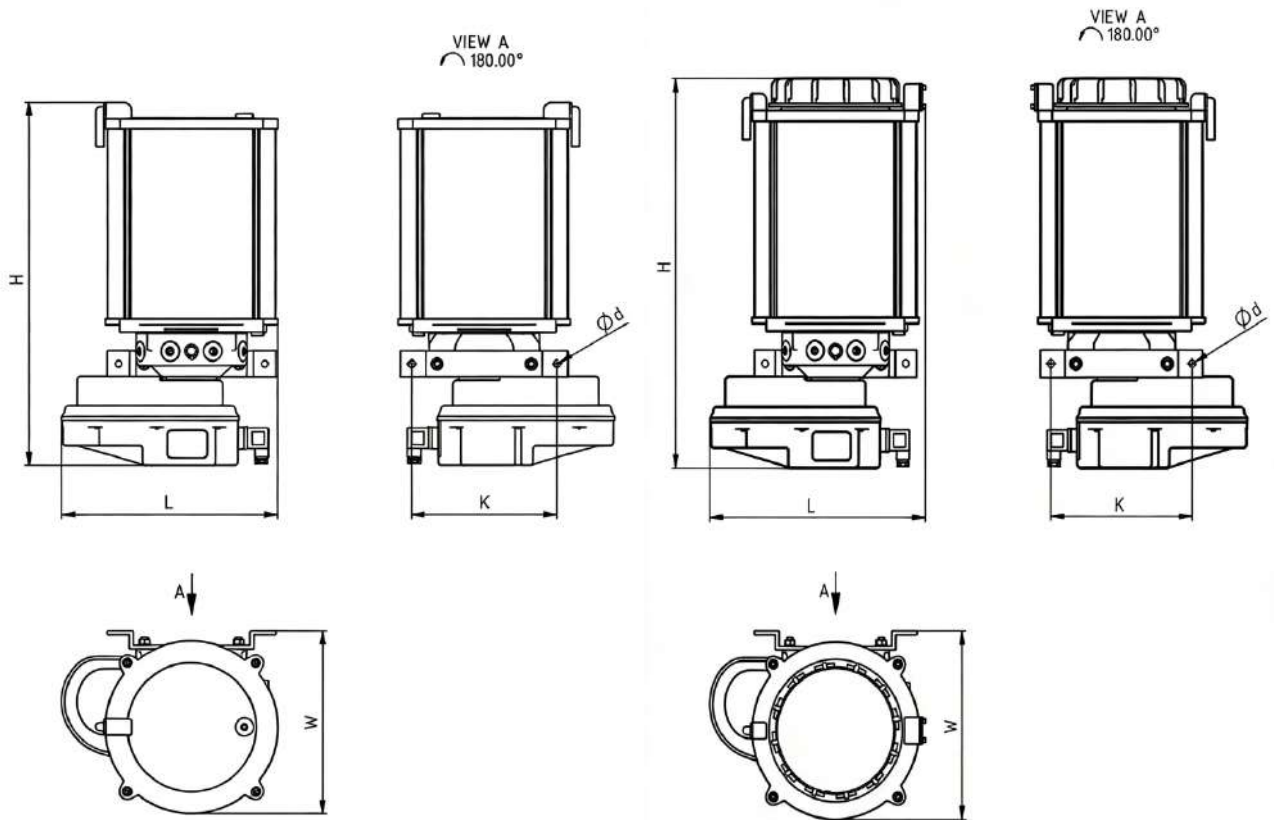


Model	Pump Element Mounting Port	Power Supply	Tank Capacity (L)	H (mm)	W (mm)	L (mm)	K (mm)	Ød (mm)
LEP213...	6 - M20x1.5	DC 24V or AC 230V/50Hz	8	495	250	296	200	9
LEP213T...				517		305		
LEP2110...			10	525	250	296	200	9
LEP2110T...				547		305		

✧ AC 380V/50 Hz, 2/4/6 L tank

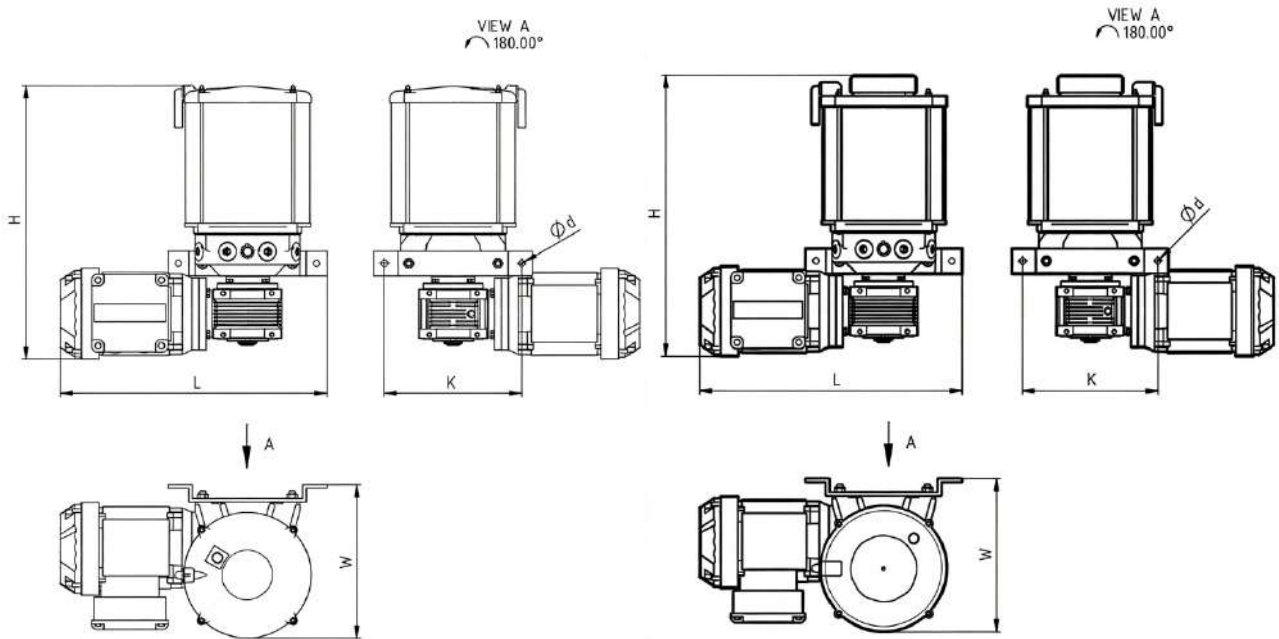

Model	Pump Element Mounting Port	Power Supply	Tank Capacity (L)	H (mm)	W (mm)	L (mm)	K (mm)	Ød (mm)
LEP211...	6 - M20x1.5	AC 380V/50Hz	2	356	224	386	200	9
LEP211T...				370				
LEP212...			4	396				
LEP212T...				410				
LEP212P...			6	488				
LEP212PT...				502				

◇ AC 380V/50 Hz, 8/10 L tank

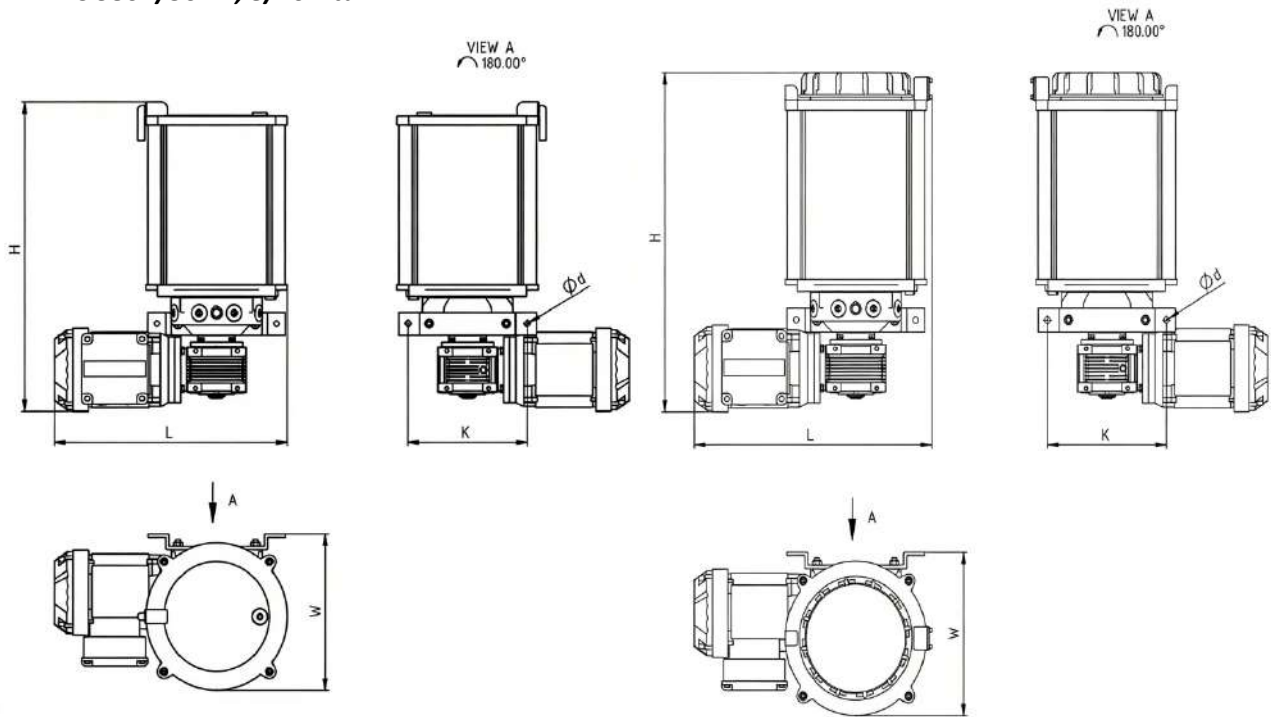

Model	Pump Element Mounting Port	Power Supply	Tank Capacity (L)	H (mm)	W (mm)	L (mm)	K (mm)	Ød (mm)
LEP213...	6 - M20x1.5	AC 380V/50Hz	8	495	250	389	200	9
LEP213T...				517		398		
LEP2110...			10	525	389			
LEP2110T...				547	398			

■ **IBX Pump Element**

Product Description




The IBX series pump elements are all plunger-type part which are driven by spring reset. The pump element has two kinds of available displacements. It's designed with a simple structure and easy to install and replace.




The adjustable pump element is a specially designed pump element that can adjust the grease output by adjusting the screw. It can conveniently adjust the grease output during the operation of the lubrication system to meet lubrication needs.

◇ **Work Principle**

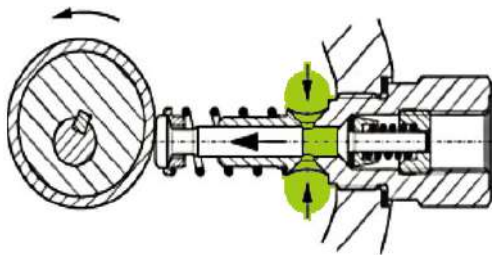

Suction phase

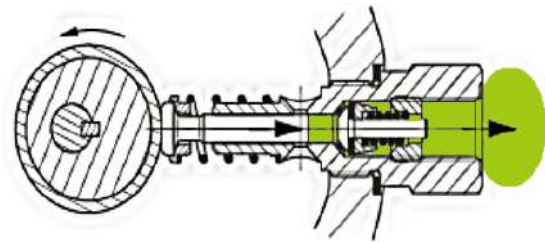

Delivery phase

◇ **Technical Data**

Model	Type	Reset Force	Displacement (cm ³ /min)	Max. Working Pressure (bar)	Mounting Thread	Outlet	Miscellaneous
IBX-3E	Normal	Spring	3.3	350	M20x1.5	G 1/4	/
IBX-4E	Normal	Spring	6.0	350	M20x1.5	G 1/4	/
IBX-4A	Adjustable	Spring	1.3 ~ 6.2	350	M20x1.5	Ferrule connector of Ø6	Safety valve integrated

■ **SV Safety Valve**



✧ **Product Description**

The safety valve is directly installed at the pump element outlet to protect the entire lubrication system from excessive pressure. The opening pressure of the safety valve is 350 bar, and the outlet pipe diameter is available in three specifications: Ø6, Ø8, and Ø10.

✧ **Technical Data**

<i>Model</i>	<i>Relief Pressure (bar)</i>	<i>Ferrule Connector (Outlet)</i>	<i>Mounting Thread (24° cone nut)</i>	<i>Relief Port Thread</i>
SV-35-06	350	Ø6	M14x1.5	G 1/8
SV-35-08	350	Ø8	M14x1.5	G 1/8
SV-35-10	350	Ø10	M18x1.5	G 1/8

■ **PFB Progressive Divider**



✧ **Product Description**

The PFB series progressive divider has a block-type integrated structure. The displacement at each outlet of the divider is fixed and uniform, at 0.2 cm³/stroke, with a max. working pressure of 350 bar. Each divider block has a minimum of 6 outlets and a maximum of 22 outlets, allowing users to choose a divider with an appropriate number of outlets based on actual lubrication needs.

✧ **Outlet Fitting**

Due to the interconnected internal machined channels, the outlet fittings of the PFB block-type divider cannot use standard fittings and require specially customized fittings. The outlet pipe diameter is Ø6 mm, and the specific order models are as follows:

Model	Type	Tube	Thread	Picture
37-2005-001	Ferrule connector	Ø6	M10x1	
32-4003-001	Push-in connector	Ø4	M10x1	
32-4003-004	Push-in connector	Ø6	M10x1	

■ **PFB Progressive Divider Part Number**

PFB - 6 - E

PFB series progressive divider _____


Quantity of outlet _____

- 6: 6 outlets 16: 16 outlets
- 8: 8 outlets 18: 18 outlets
- 10: 10 outlets 20: 20 outlets
- 12: 12 outlets 22: 22 outlets
- 14: 14 outlets

Blockage monitor _____

- Blank: No
- M: Visual indicator
- E: Piston detector, DC 24V, PNP NO
- EV: Piston detector, DC 24V, PNP NO, with 5m cable

■ PFB Progressive Divider Dimension

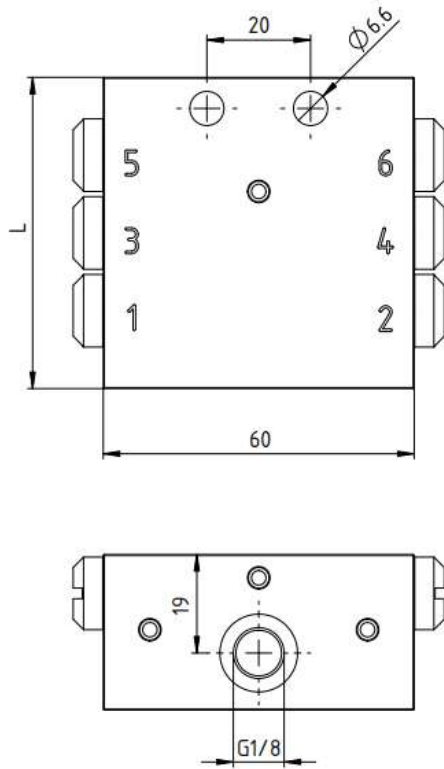

Model	L (mm)
PFB-6-...	60
PFB-8-...	75
PFB-10-...	90
PFB-12-...	105
PFB-14-...	120
PFB-16-...	135
PFB-18-...	150
PFB-20-...	165
PFB-22-...	180

■ **PFM Progressive Divider**



✧ **Product Description**

The PFM series progressive divider has a modular structure, with each block locked together by fastening bolts. The PFM divider consists of three parts: a head block, several intermediate blocks and an end block. The head block and end block are standard configurations, while all intermediate blocks are metering blocks, which can be freely selected and combined as needed.

However, the total number of metering blocks must be at least 3 (for 6 outlets) and no more than 10 (for 20 outlets). The PFM divider is available in 8 displacements with a maximum operating pressure of 250 bar.

■ **PFM Progressive Divider Part Number**

PFM - 4/6 - 06S/12S/20T/24T - E

PFM series progressive divider _____

Quantity of metering blocks / outlet _____

X / Y: X metering blocks / Y outlets

X: Any number between 3 and 10

Y: Any number between 1 and 20

Metering blocks model ¹⁾ _____

06T: 2 outlets and 0.06 cm³/stroke/outlet

12T: 2 outlets and 0.12 cm³/stroke/outlet

20T: 2 outlets and 0.20 cm³/stroke/outlet

24T: 2 outlets and 0.24 cm³/stroke/outlet

06S: 1 outlet and 0.12 cm³/stroke/outlet

12S: 1 outlet and 0.24 cm³/stroke/outlet

20S: 1 outlet and 0.40 cm³/stroke/outlet

24S: 1 outlet and 0.48 cm³/stroke/outlet

Blockage monitor ²⁾ _____

Blank: No

M: Visual indicator


E: Piston detector, DC 24V, PNP NO

EV: Piston detector, DC 24V, PNP NO, with 5m cable

1) When selecting the metering blocks, the first one is the one after head block and others are selected in sequence.

2) "M" is available only when selecting any one metering block of "20T", "20S", "24T" and "24S".

■ PFM Progressive Divider Dimension

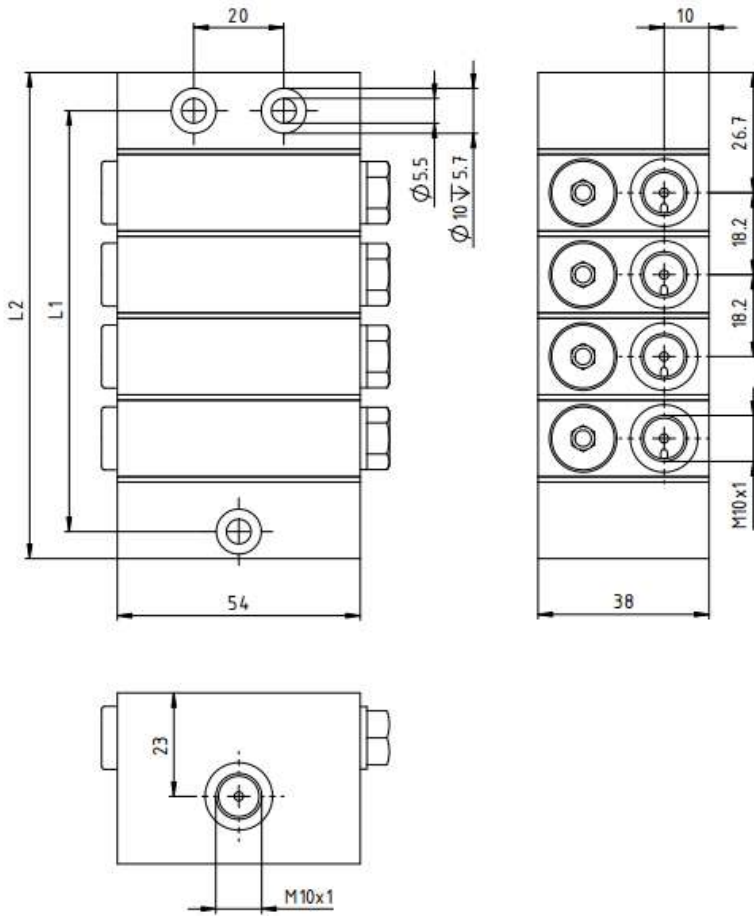

Model	L1 (mm)	L2 (mm)
PFM-3/ -...	75.3	89.8
PFM-4/ -...	93.5	108.0
PFM-5/ -...	111.7	126.2
PFM-6/ -...	129.9	144.4
PFM-7/ -...	148.1	162.6
PFM-8/ -...	166.3	180.8
PFM-9/ -...	184.5	199.0
PFM-10/ -...	202.7	217.2

■ **PFMS Progressive Divider**



✧ **Product Description**

The PFMS series progressive divider has a modular structure, with each block locked together by fastening bolts. Its dimensions are smaller than PFM dividers. The PFMS divider consists of three parts: a head block, several intermediate blocks and an end block. The head block is standard configurations, while all end block and intermediate blocks are metering blocks, which can be freely selected and combined as needed.

However, the total number of metering blocks must be at least 3 (for 6 outlets) and no more than 10 (for 20 outlets). The PFMS divider is available in 6 displacements with a maximum operating pressure of 250 bar.

■ **PFMS Progressive Divider Part Number**

PFMS - 4/7 - 45T/75T/105T/45S - E

PFMS series progressive divider _____

Quantity of metering blocks / outlet _____

X / Y: X metering blocks / Y outlets

X: Any number between 3 and 10

Y: Any number between 1 and 20

Metering blocks model ¹⁾ _____

45T: 2 outlets and 0.045 cm³/stroke/outlet

45S: 1 outlet and 0.09 cm³/stroke/outlet

75T: 2 outlets and 0.075 cm³/stroke/outlet

75S: 1 outlet and 0.15 cm³/stroke/outlet

105T: 2 outlets and 0.105 cm³/stroke/outlet

105S: 1 outlet and 0.21 cm³/stroke/outlet

Blockage monitor ²⁾ _____

Blank: No

M: Visual indicator


E: Piston detector, DC 24V, PNP NO

EV: Piston detector, DC 24V, PNP NO, with 5m cable

1) When selecting the metering blocks, the first one is the one after head block and others are selected in sequence.

2) "M" is available only when selecting any one metering block of "75T", "75S", "105T" and "105S".

■ PFMS Progressive Divider Dimension

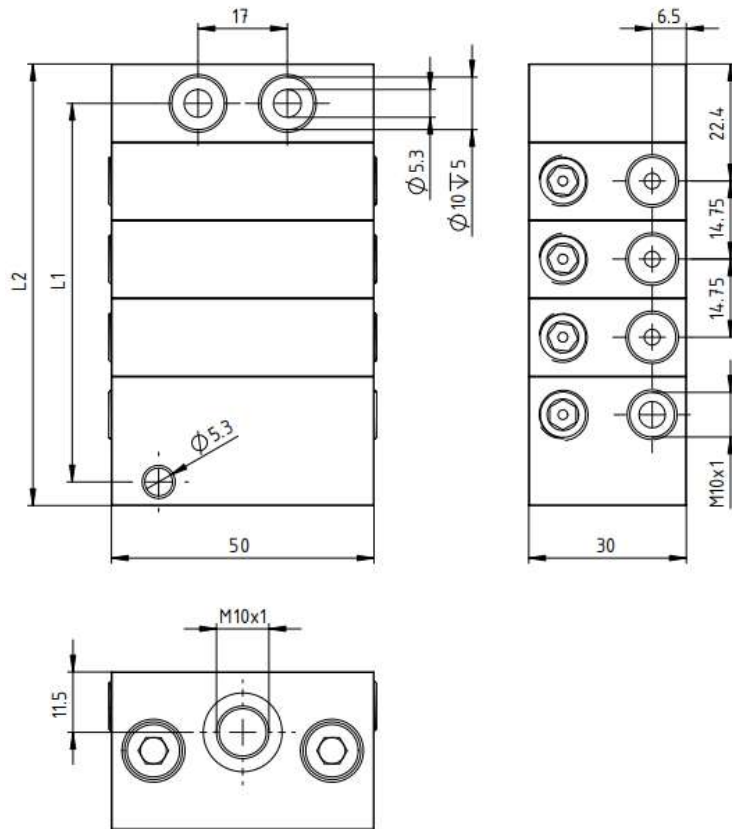

Model	L1 (mm)	L2 (mm)
PFMS-3/ -...	57.2	69.20
PFMS-4/ -...	72.0	83.95
PFMS-5/ -...	86.7	98.70
PFMS-6/ -...	101.5	113.45
PFMS-7/ -...	116.2	128.20
PFMS-8/ -...	131.0	142.95
PFMS-9/ -...	145.7	157.70
PFMS-10/ -...	160.5	172.45

■ **PFG Progressive Divider**



✧ **Product Description**

The PFG series progressive divider has a modular structure, with each block locked together by fastening bolts. Its dimensions are much bigger than PFM & PFMS dividers. The PFG divider consists of four parts: a head block, several intermediate blocks, several metering blocks and an end block. The head block, intermediate block and end block are standard configurations, while selecting different metering blocks. It can be freely selected and combined as needed.

However, the total number of metering blocks must be at least 3 (for 6 outlets) and no more than 10 (for 20 outlets). The PFG divider is available in 16 displacements with a maximum operating pressure of 250 bar.

■ **PFG Progressive Divider Part Number**

PFG - 3/4 - 625T/625T/155S - E

PFG series progressive divider _____

Quantity of metering blocks / outlet _____

X / Y: X metering blocks / Y outlets
X: Any number between 3 and 10
Y: Any number between 1 and 20

Metering blocks model ¹⁾ _____


100T: 2 outlets and 0.100 cm ³ /stroke/outlet	100S: 1 outlets and 0.200 cm ³ /stroke/outlet
155T: 2 outlets and 0.155 cm ³ /stroke/outlet	155S: 1 outlets and 0.310 cm ³ /stroke/outlet
225T: 2 outlets and 0.225 cm ³ /stroke/outlet	225S: 1 outlets and 0.450 cm ³ /stroke/outlet
305T: 2 outlets and 0.305 cm ³ /stroke/outlet	305S: 1 outlets and 0.610 cm ³ /stroke/outlet
400T: 2 outlets and 0.400 cm ³ /stroke/outlet	400S: 1 outlets and 0.800 cm ³ /stroke/outlet
505T: 2 outlets and 0.505 cm ³ /stroke/outlet	505S: 1 outlets and 1.010 cm ³ /stroke/outlet
625T: 2 outlets and 0.625 cm ³ /stroke/outlet	625S: 1 outlets and 1.250 cm ³ /stroke/outlet
755T: 2 outlets and 0.755 cm ³ /stroke/outlet	755S: 1 outlets and 1.510 cm ³ /stroke/outlet

Blockage monitor _____

Blank: No
M: Visual indicator
E: Piston detector, DC 24V, PNP NO
EV: Piston detector, DC 24V, PNP NO, with 5m cable

1) When selecting the metering blocks, the first one is the one after head block and others are selected in sequence.

■ PFG Progressive Divider Dimension

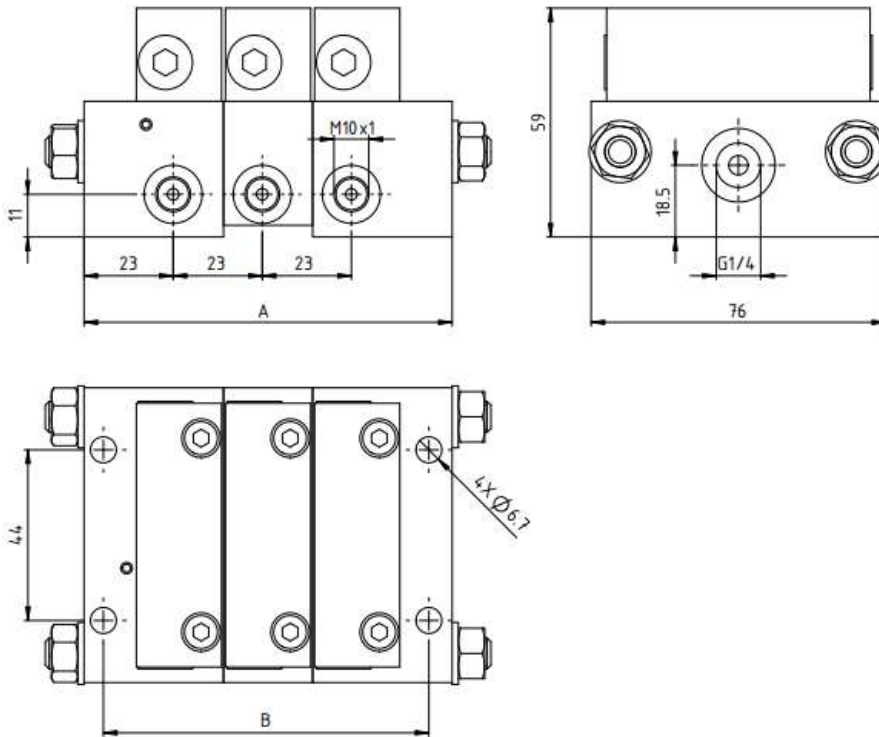

Model	L1 (mm)	L2 (mm)
PFG-3/ -...	84	95
PFG-4/ -...	107	118
PFG-5/ -...	130	141
PFG-6/ -...	153	164
PFG-7/ -...	176	187
PFG-8/ -...	199	210
PFG-9/ -...	222	233
PFG-10/ -...	245	256

Statement:

Without permission, all or part of the contents in this manual shall not be quoted or copied. We have tried our best to ensure that the contents in this manual are accurate. Our company does not assume any direct, indirect or joint liability for the use of any technology and related products mentioned in this manual without our approval.

Publication No.: INALUBE-LUBelite/Progressive-01

Version: 1.0

Date: 2026.03

Shanghai INA Machinery Science & Technology Co., Ltd

Room 201, Building D, No.555 Wanfang Road, Minhang District, Shanghai, China

Tel.: +86 21 2042 2806

Mobile: +86 187 1781 3303

Email: sales@inalube.com

Website: www.inalube.com